


DATASHEET

RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, black



Description

The shielded Cat.6A RJ45 patch cable with **component certification** from the GHMT ensures excellent performance for 10 Gigabit Ethernet applications. The **TPE** outer sheath makes the cable **highly flexible** and thus easier to handle. The moulded grommet captivates with its **slim design** and thus simplifies the insertion process in cramped conditions.

Very flexible TPE/LSZH outer sheath superflex

Cross section 4 x 2 x AWG26 / 7

Moulded grommet, slim design

Length imprint on the boot

General data

Category	6A (IEC)
Type of connector connection 1	RJ45 8(8)
Type of connector connection 2	RJ45 8(8)
Connector type	RJ45 Standard blue
Contacts	50 µ" gold plated
Pin assignment	1:1
Allocation	acc. TIA/EIA 568B
Type	Shielded
Length imprint	yes
Anti-kink sleeve	moulded
Colour anti-kink sleeve	black
Locking lever	True

Mechanical characteristics

Mating cycles	≥750
Bending radius	>32,5 mm

This datasheet was created automatically on 22-10-2019 . Technical changes reserved.



DATASHEET

RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, black

Mechanical characteristics

Conductive shield | 360° shield contact

Kabelaufbau

Raw cable	Cat.7
Cable structure	S/FTP
Cable construction	4x2
AWG-size/strands per core	26/7
Conductor Material	Copper

Kabelmantel

Silicone-free	yes
Jacket material	TPE/LSZH
Colour outer sheath	black
Printing	Cat.6A Patchcord SUPERFLEX S/FTP
Outer diameter of the cable	6.5 mm
Flame-retardant	acc. IEC60332-1
Halogen-free	acc. IEC60754-2
Low smoke	acc. IEC61034

Environmental conditions

Temperature range | -20 – 75 °C

Electrical characteristics

NVP value	-
Impedance	100 ±15 Ω
Conductor resistance DC	142 Ω/km
Loop resistance	284 Ω/km
Resistance unbalance	2 %
Insulation resistance	100 MΩ
Contact resistance	30 mΩ
Dielectric Withstanding Voltage	1000 V AC 60Hz

Transmission characteristics

Bandwidth | 500MHz

Standards, approvals, certifications

Connector | IEC 60603-7-51

This datasheet was created automatically on 22-10-2019 . Technical changes reserved.




DATASHEET

RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, black

Available variants

Article no.	Title	Length
K5525FSW.0,15	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 0,15m, black	0.15 m
K5525FSW.0,25	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 0,25m, black	0.25 m
K5525FSW.0,5	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 0,5m, black	0.5 m
K5525FSW.1	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 1m, black	1 m
K5525FSW.1,5	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 1,5m, black	1.5 m
K5525FSW.2	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 2m, black	2 m
K5525FSW.3	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 3m, black	3 m
K5525FSW.5	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 5m, black	5 m
K5525FSW.7,5	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 7.5m, black	7.5 m
K5525FSW.10	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 10m, black	10 m
K5525FSW.15	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 15m, black	15 m
K5525FSW.20	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 20m, black	20 m
K5525FSW.25	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 25m, black	25 m
K5525FSW.30	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, 30m, black	30 m

Technical drawings

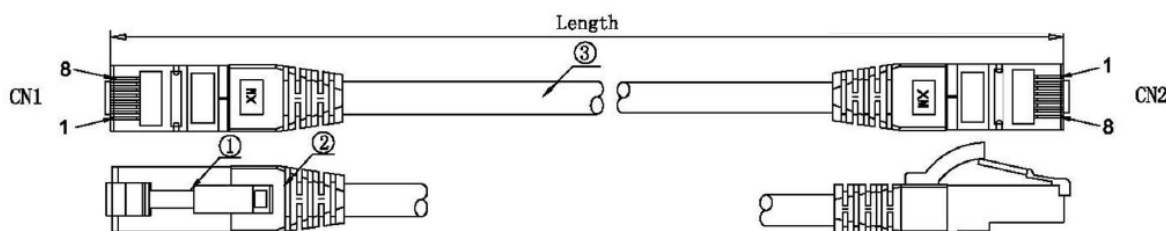

PIN OUT	
CN1 (568B)	CN2 (568B)
WHITE 1	1 WHITE
ORANGE 2	2 ORANGE
WHITE 3	3 WHITE
GREEN 6	6 GREEN
BLUE 4	4 BLUE
WHITE 5	5 WHITE
WHITE 7	7 WHITE
BROWN 8	8 BROWN
SHELL	BRAID SHELL

similar product

K5525FWS.1

RJ45 Patchkabel S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, white

This datasheet was created automatically on 22-10-2019 . Technical changes reserved.



DATASHEET

RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, black

similar product

K5525FRT.1	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, red
K5525FGR.1	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, grey
K5525FGN.1	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, green
K5525FGE.1	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, yellow
K5525FBL.1	RJ45 Patch cable S/FTP, Cat.6A, Cat.7 Raw cable TPE superflex, blue

This datasheet was created automatically on 22-10-2019 . Technical changes reserved.



EFB-Elektronik GmbH
Striegauer Straße 1
33719 Bielefeld

fon: +49 521 40 41 8-0
fax: +49 521 40 41 8-50

info@efb-elektronik.de
www.efb-elektronik.de

WIR SORGEN FÜR VERBINDUNG
WE CARE FOR CONNECTION

